
CLOUTH HS-1 TOP-PLATE
Top-Plate

KEY FEATURES
100% special carbon fibre constuction
Available in thicknesses of 3 mm (4 mm optional)
Interchangeable with the CLOUTH® HS-1 top-plate metric and imperial
Individual length and width
Tolerance: max ± 0.01 mm over 14000 mm

ADVANTAGES
Temperature resistant up to 185°
High chemical resistance
Cannot be permanently deformed
Constant and even doctor blade loading pressure
Stronger than normal stainless steel top-plate
Light-weight, easy mounting
Extremely accurate tolerances

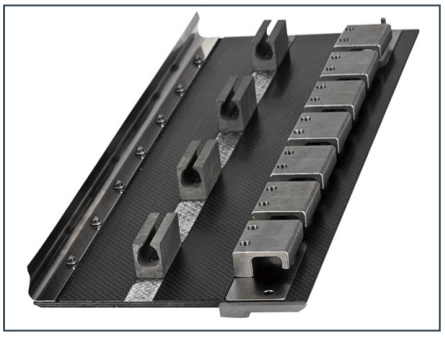

JOH. CLOUTH®
A CLOUTH GROUP MEMBER

Joh. Clouth GmbH
Johann-Clouth-Straße 1-5
D-42499 Hückeswagen
Phone: + 49 2192 853-0
E-Mail: sales@clouth-group.com

© Joh. Clouth GmbH