
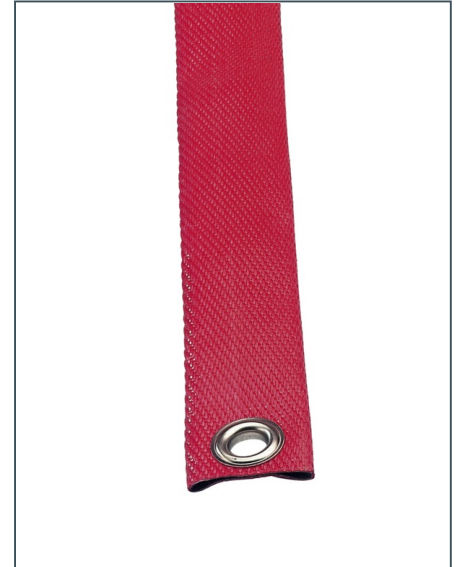


## CLOUTH-AIRFLEX® 100

### Flexible pressure tubing

MATERIAL	
BASIC: 100% polyester, tubular weave	
INNER LINING: High quality, oil and petrol resistant, fully synthetic rubber mixture	
OUTER COVER: High quality nitrile rubber	
Silicone coated	
MATERIAL COLOUR	 red
INNER DIAMETER	25.4 mm / 28.0 mm
TEMPERATURE RESISTANCE	up to maximum 100°C
EXPANSION LENGTH	5%
EXPANSION WIDTH	5%
OPERATING PRESSURE	max. 6 bar



ADVANTAGES	
Robust smooth red surface	
High abrasion resistance	
Weather-proof	
Rot-proof	
Ozone and UV stable	
Resists soiling	



**JOH. CLOUTH®**  
A CLOUTH GROUP MEMBER

#### Joh. Clouth GmbH

Johann-Clouth-Straße 1-5  
D-42499 Hückeswagen  
Phone: + 49 2192 853-0  
E-Mail: [sales@clouth-group.com](mailto:sales@clouth-group.com)